



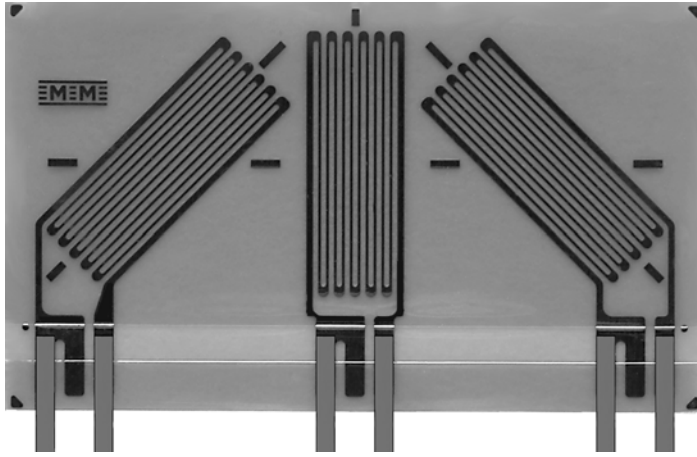


General Purpose Strain Gages - Rectangular Rosette

GAGE PATTERN DATA					
  actual size			GAGE DESIGNATION See Note 1	RESISTANCE (OHMS) L2A-XX-250LR-120 120 ± 0.6% L2A-XX-250LR-350 350 ± 0.6% C2A-XX-250LR-120 120 ± 0.6% C2A-XX-250LR-350 350 ± 0.6%	OPTIONS AVAILABLE
			DESCRIPTION General-purpose 45° rectangular single-plane rosette.		 RoHS COMPLIANT
GAGE DIMENSIONS			Legend: ES = Each Section S = Section (S1 = Sec 1)	CP = Complete Pattern M = Matrix	<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.250	0.373	0.100	0.655	0.420	0.715
6.35	9.47	2.54	16.64	10.67	18.16

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
L2A	Encapsulated constantan gages with preattached ribbon leads.	±3%	-100° to +250°F [-75° to +120°C]
C2A	Encapsulated constantan gages with preattached ready-to-use cables.	±3%	-60° to +180°F [-50° to +80°C]



Example of an
L2A Construction



Example of a
C2A Construction

Note 1: Insert desired S-T-C number in spaces marked XX.