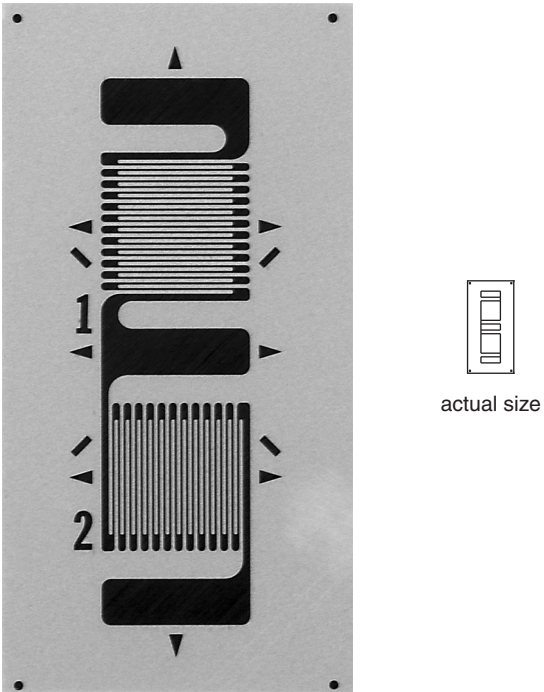


General Purpose Strain Gages - Tee Rosette

GAGE PATTERN DATA					
			GAGE DESIGNATION See Note 1, 2	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 2
			EA-XX-062TJ-120 EA-XX-062TJ-350 SA-XX-062TJ-120 SA-XX-062TJ-350	120 ± 0.2% 350 ± 0.2% 120 ± 0.4% 350 ± 0.4%	
DESCRIPTION General-purpose 90° tee rosette. Sections have a common solder tab.					
GAGE DIMENSIONS		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.062 ES	0.295 CP	0.080 ES	0.080 CP	0.38	0.19
1.57 ES	7.49 CP	2.03 ES	2.03 CP	12.2	4.8

GAGE SERIES DATA			
See Gage Series data sheet for complete specifications.			
Series	Description	Strain Range	Temperature Range
EA	Constantan foil in combination with a tough, flexible, polyimide backing.	±3%	-100° to +350°F [-75° to +175°C]
SA	Fully encapsulated constantan gages with solder dots.	±2%	-100° to +400°F [-75° to +205°C]

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.